

SimpleFit Pleated – Measuring guide

Flush or Recessed Rubber Bead



Measure clear glass width and drop

- min. width: 240mm
- max. width: 1400mm
- max. drop: 2000mm
- max. area: 1.5 sq m

Proud Rubber Bead



measuring the window

A

Tape Measure




Depth Gauge



- bead depth 19 to 27mm: no endcap spacer
- bead depth 15 to 18mm: 1 endcap spacer per side
- bead depth 11 to 14mm: 2 endcap spacers per side
- min. bead depth: 11mm

bead depth

B



Profile A



Profile B



Profile C



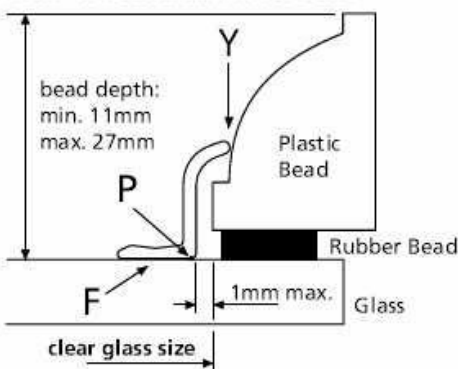
Profile D

All profiles are shown at 2x actual size

side profile

C


Flush or Recessed Rubber Bead



Select side profile that:-





- gives best fit at Y,
- has max. 1mm gap between point P and clear glass size,
- keeps face F flat on glass

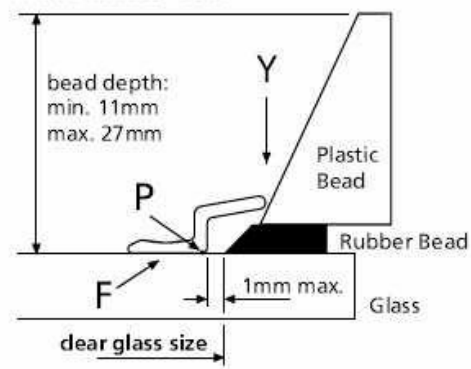Proud Rubber Bead



rubber bead

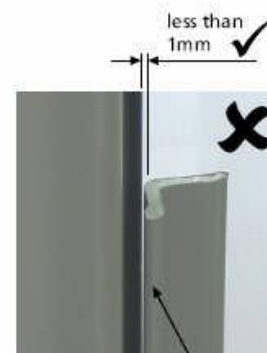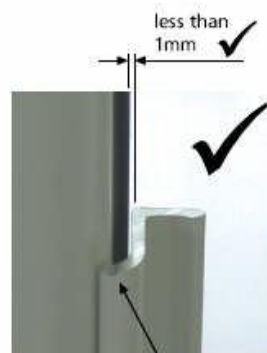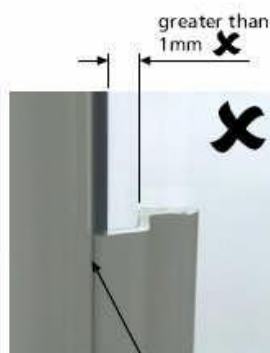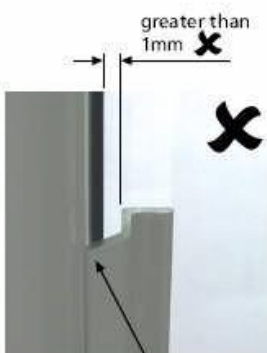
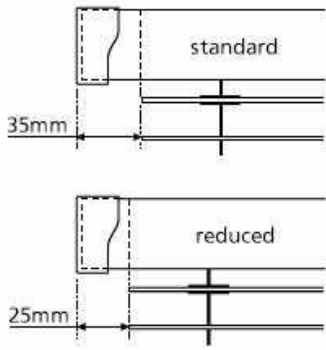
D


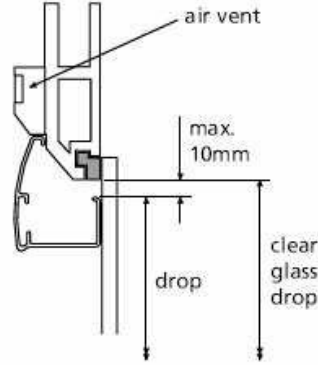



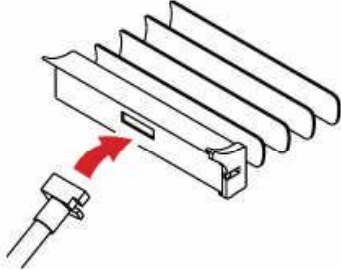
best fit profile


E

SimpleFit Pleated – Measuring guide

<p>F</p>	<p>special headrail</p>		<p>Reduced Headrail — All Models</p> <ul style="list-style-type: none"> insufficient clearance on window frame or glazing bar will require modified headrails reduction will be 10mm per side note requirements on order form 'Special Instructions' box 	
-----------------	-------------------------	--	--	---

<p>G</p>	<p>air vents</p>		<p>Air Vents</p> <p>When headrail may foul air vent or other obstruction, a deduction of up to 10mm can be made from the clear glass drop to clear obstruction</p>	
-----------------	------------------	---	---	---

<p>H</p>	<p>operating rod</p>		<p>Blind Out of Reach — All Models For Model 120 (see below)</p> <ul style="list-style-type: none"> choose 30 or 60cm rod as required bottom rail is slotted for raising/lowering 	
-----------------	----------------------	--	--	--
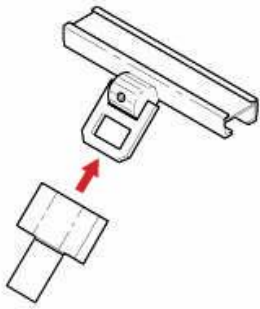
<p>I</p>	<p>operating rod</p>		<p>Blind Out of Reach — Model 120</p> <ul style="list-style-type: none"> For Model 120 top down/bottomup a 'Twistlock handle' is fitted to the centre of the bottomrail. operating rod (PH135) fitted with matching 'Twistlock' connector is supplied. Suggested to order 1 per installation push rod connector over handle and rotate rod clockwise (requires about 30 degrees rotation) rod is now locked on rail raise/lower as required rotate rod anticlockwise to release 	
-----------------	----------------------	---	--	--

<p>J</p>	<p>multizone</p>	 <p>Bottomrail with integrated handle</p>	<p>All blinds are supplied with bottomrail that has an integrated handle.</p> <p>Model 120 blinds will have screw in handles</p>	 <p>Bottomrail with screw in handle</p>
-----------------	------------------	--	--	--