

Perfect Fit Roller Blind System

Fitting instructions



PERFECT FIT
LOUVOLITE®


Perfect Fit Roller Blind System

Fitting instructions


Fitting Curved Top Section

For Golden Oak and silver frames:
Slide top of curved section into the rest of the frame.

For white and brown frames:
Slide top of curved section into the rest of the frame, ensuring that end caps are located into the side channel.

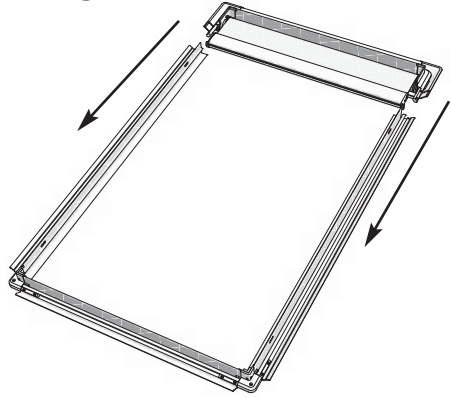


Fix securely with the two screws on each joint.

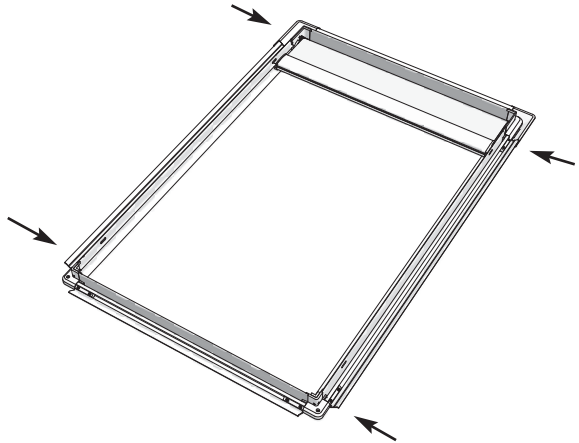

Securing Bottom Bar

Fix one side in position at a slight angle then place the opposite side into position. Please ensure that the bottom bar sits behind the grooving.




Fitting Perfect Fit

To ensure all brackets are in the correct position for fitting (85mm from beading) use a credit card in the corner of the window to insert the bracket.

For ease of insertion, use a lubricant in the form of washing up liquid on the base of each bracket.

Line up bracket with edge of card

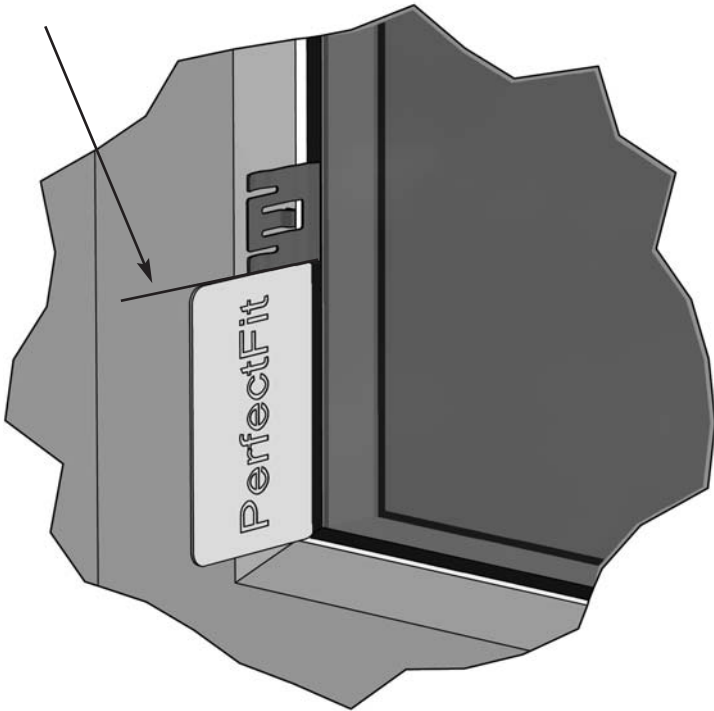


Line up the bracket with the base or top of the credit card (depending on which corner of the window you are working) and fit the bracket by pushing it between the glass and the rubber seal of the window.


Repeat for all 4 corners of the window, and intermediate brackets (if required) then clean excess lubricant prior to fitting the frame.

Fitting the Frame

Line up the holes in the frame with the brackets

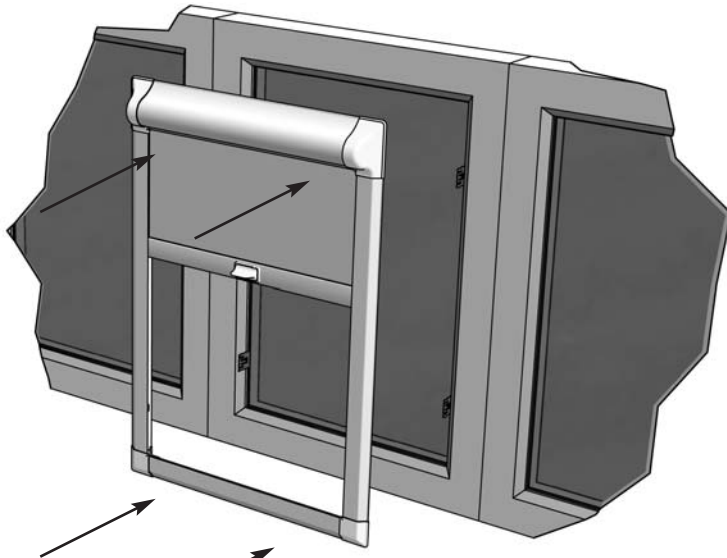


Firmly press down the frame onto each bracket. Do one side at a time for an easier installation.

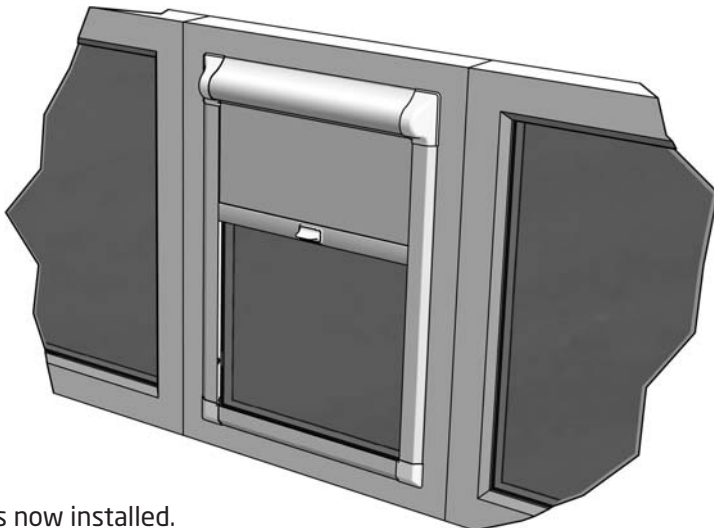


Your blind is now installed.

How to Operate (Perfect Fit white & brown frames)


To release the blind, rock the handle forwards. The blind is then free to open and close.

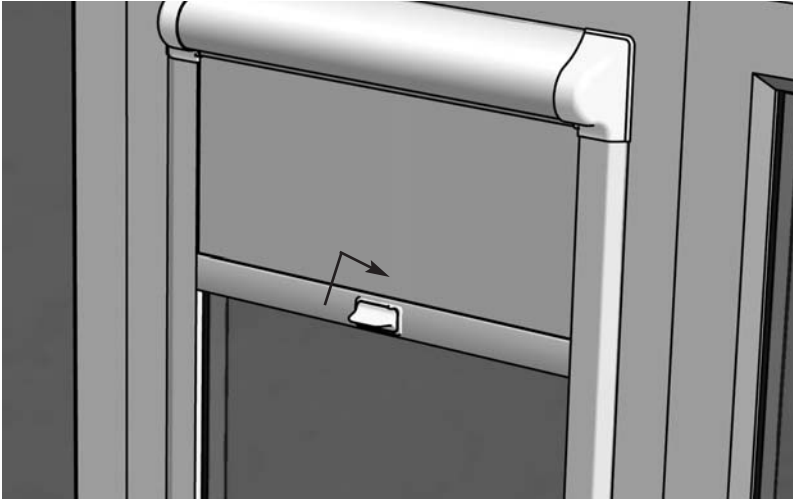

To lock the blind into position, rock the handle backwards.

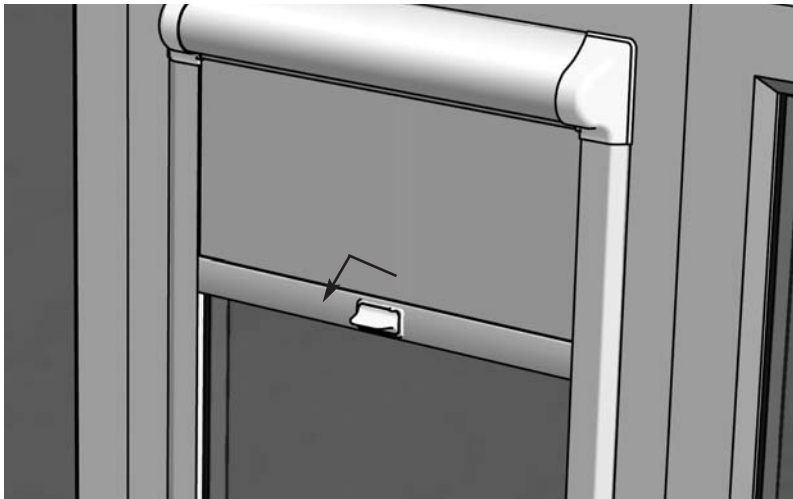

How to Operate (Perfect Fit golden oak & silver frames)


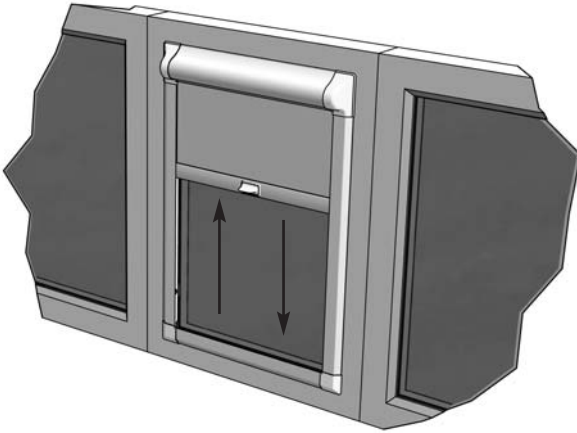


Holding the Perfect Fit handle slide the blind up and down within the frame

Re - Tensioning the bottom spring (if required)

Remove the frame from the window.

Turn the frame over and release the screw on the barrel clamp.

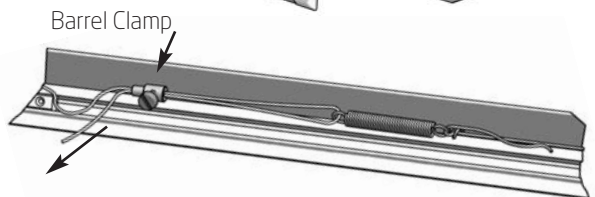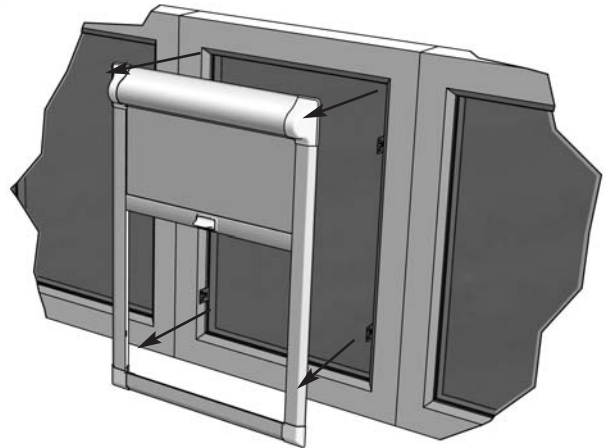

Pull the loose end of the cord through the barrel clamp to take up the slack and re-tighten the screw to hold the cord in the clamp.

If necessary tighten the cord further to hold the blind down in the lower position.

Adding 'Wrap Tension' if required

In order for the fabric to roll up, we need to add 'wrap tension' at the top of the blind.



1. Pull down the blind (do not manually push back up as it needs to raise naturally with the tension)

2. Insert a 4mm allen key or angled allen drive attachment (R9002 as shown) into the hexagon slot in the control end.


3. Turn 'anti-clockwise' to add tension until the blind starts to lift.

4. Tension is complete when the blind is fully opened.

5. Push the worm retaining clip into the hexagon slot to secure the tension.

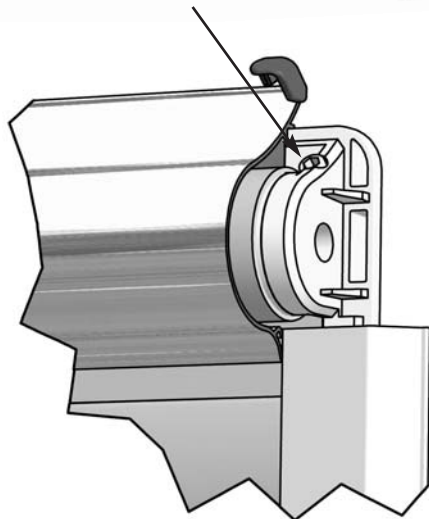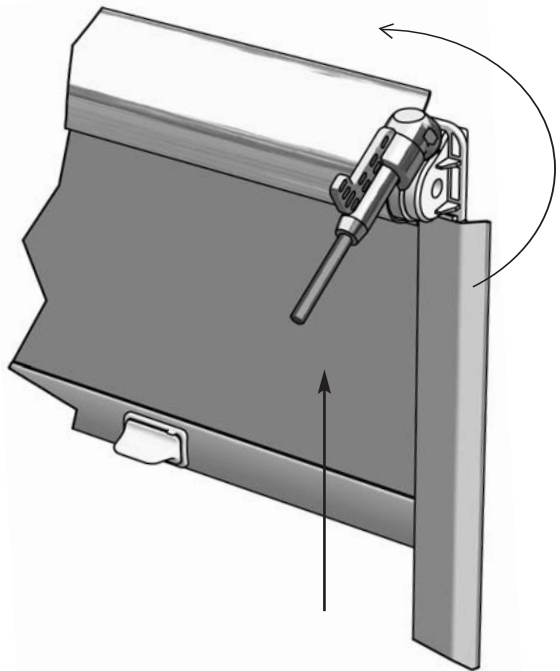

Louvolite Perfect Fit® window blinds

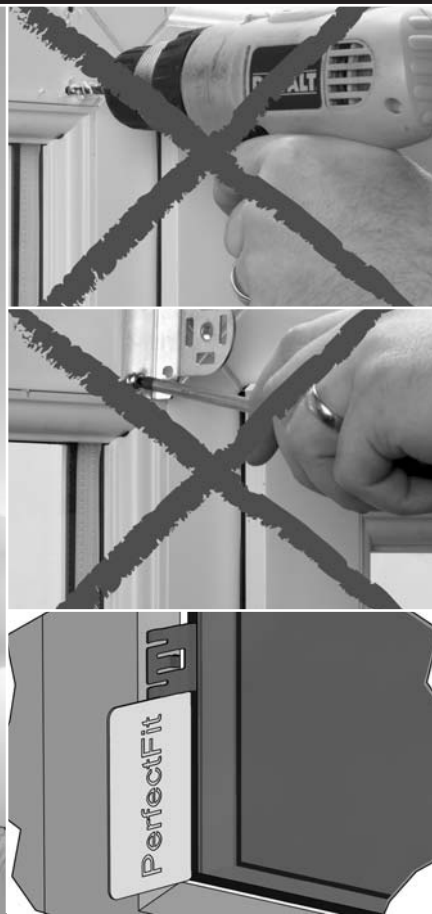

Code: 9403

Louvolite, Ashton Road, Hyde, Cheshire SK14 4BG
T: 0161 882 5000 F: 0161 882 5009
email: orders@louvolite.com www.louvolite.com

PERFECT FIT
LOUVOLITE®