

Venetian Blinds

Fitting & Operating Instructions

READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLING THIS BLIND.

Blind headrails should not be installed less than 1.5m from the floor.

Your venetian blind is fitted in three simple stages. Please complete them in the correct order when installing your blind.

1. Fit the installation Brackets



Mark hole position on fitting surface. Brackets should be spaced out at equal intervals. Drill hole in substrate at each marked position. If required, fit wall plugs.



Screw brackets into place, ensuring they are aligned

2. Attach the Venetian Blind

1 Push the swinging arm anti-clockwise rotating it as far as it will go. Clip the Venetian blind over the installation bracket, first pushing the front lip of the headrail (F) into place before pushing the headrail up and back until it is level.

2 Holding the Venetian blind headrail firmly, push the swinging arm clockwise so it rotates until it locks into place. If you need to remove the Venetian blind, simply reverse this operation to release the headrail.

3 To raise or lower the venetian blind, use the control cord (C). To tilt and adjust the angle of the aluminium slats twist the wand or pull the tilt cords (W/TC)

3. Install the cord accumulation device

WARNING Children can strangle if this safety device is not installed. Always use this device to keep cords out of the reach of children.

1. The cord accumulation device shall be installed as close to the headrail as possible and, in all cases, not less than 1.5m from the floor.

2. To fit, mark the two holes (H2) and secure with the correct fixing for your wall construction.

3. When the blind is raised ensure any excess cord is stored on the accumulation device. The cord should be accumulated by winding in a figure of eight motion as shown in figure 1.

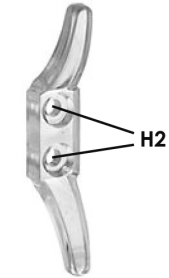


Fig. 1



On larger blinds with four cords, two accumulation device might be necessary. If two accumulation devices are supplied please fit these 100mm apart again ensuring that both of these devices are no less than 1.5m from the floor.

P-Clip Installation

(For use with Dominica and Equador cord tilt only)

Venetian Blinds


Fitting & Operating Instructions

Note to installer: Please ensure a general shield safety warning tag is fitted on the product.

WARNING

According to EN 13120


- Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product. They can also wrap cords around their necks.
- To avoid strangulation and entanglement, keep cords out of reach of young children.
- Move beds, cots and furniture away from window covering cords.
- Do not tie cords together. Make sure cords do not twist and create a loop.
- Install and use the included safety devices according to the installation instructions on these devices to reduce possibility of such an accident.

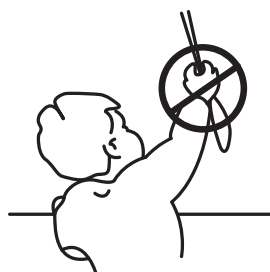

Operating your blind

LOWERING

To unlock the cords, pull towards the centre of the blind and release gently through the hand until the required drop is reached. Lock the cords by pulling the cords to the outside of the blind to engage the cord lock.

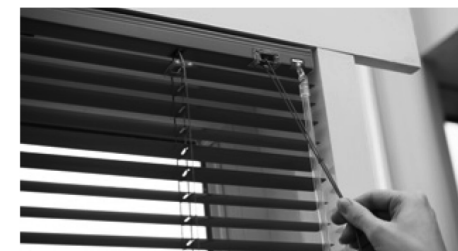

RAISING

With slats fully open, pull cords downwards until the desired height is reached. Lock as described above.

N.B. Never raise the blind when the slats are in a closed position.

TILTING

- **DOMINICA & EQUADOR (35mm & 50mm) Blinds**
Pull either side of the cord loop downwards to tilt the slats to the desired angle.
- **SANTANA (15mm & 25mm) Blinds**
Rotate the clear wand clockwise or anti-clockwise to tilt the slats to the angle of your choice.

Maintenance

The slats may be kept free of dust etc with an occasional wipe with a cloth.

Child Safety

It is important that your Venetian Blind has the required Child Safety devices to ensure it is Child Safe. If you have any questions regarding the safety of your blind, please contact your retailer or installer.