

blocblinds[®]

BlocOut[™]

Blackout Blind



A new way of thinking

BlocOut™

Blackout Blind

BlocOut™ is capable of blocking light and draughts thanks to the exceptional quality of its individual components. Each part, from the brush seals to the cassette holder and aluminium frames are designed to last. BlocOut™ blinds come in a wide range of colours and patterns to suit all environments and tastes.



Window with
Curtains



Window with
BlocOut™



Curtains trap hot air and prevent it circulating the room. This can lead to heat loss. BlocOut™ creates an energy efficient barrier that minimizes heat loss through the window and leaves radiators free to heat the room.



(1)



(2)



(3)



(4)

Bloc Blinds incorporate a number of specially developed features that make our blinds superior to others on the market. (1) Rubber seals create a barrier between the blind and the window sill, blocking out light and reducing heat loss. (2) Clips are attached to the

fabric to ensure the blind stays securely within the runners at all times. (3) The fabric is completely enclosed, reducing fading and significantly extending the life of the fabric. (4) Brush seals offer the highest possible degree of light exclusion and draught prevention.


Frame Colour Options



Anodised Silver
Natural Finish



White
Matt Finish



Cream
Matt Finish

BlocOut™

Blackout Blind

Fitting Type




Edge of the Recess Fix
Drill Free Installation



Inside the Recess Fix
Drill Free Installation

Fixing Components In Position

Edge of the Recess Fix




Inside the Recess
3 Sided Frame




Fixing Components

Guide Dog Edge of the
Recess Fix




Inside the Recess
3 Sided Frame Fix




Product Dimensions

Edge of the Recess

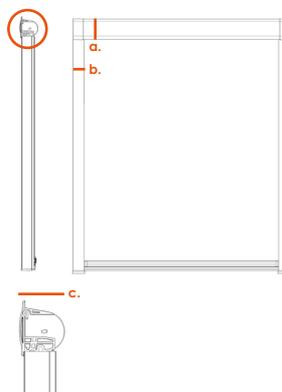

a. Cassette Height: 60mm
b. Frame Width: 32mm
c. Cassette Depth: 52mm

Inside the Recess 3 Sides

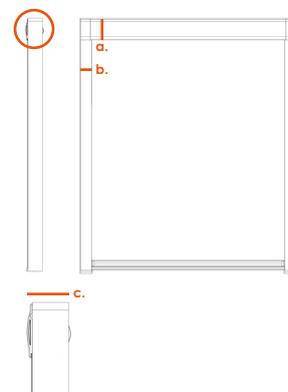

a. Cassette Height: 60mm
b. Frame Width: 32mm
c. Cassette Depth: 52mm

BlocOut™

Blackout Blind

Product Specification

| Size Range | | Roller Tube | Aluminium |
|------------|--------|-----------------|---------------------------------|
| Min Width | 400mm | Cassette Colour | Anodised Silver / White / Cream |
| Min Drop | 300mm | Bottom Detail | Handle Colour to Match Cassette |
| Max Width | 1800mm | Control | Spring |
| Max Drop | 1500mm | Fabric Position | Reverse Roll |

Operation, Care and Maintenance

Operation

The blind is operated via a spring system using the handle at the bottom of the blind. The blind simply pulls down through the side channels locking whenever the handle is released. The handle is then pushed in towards the window releasing the lock which enables the spring to retract the fabric. It complies fully with all European child safety standards.

Care Instructions

We are all very proud of our stunning BlocOut™ blind range. To keep them looking their best for years to come, always ensure that your BlocOut blinds have been securely fitted, use a synthetic or feather duster and refrain from using soap and water. Should any part of the blind fail contact our dedicated Customer Service team who will be happy to assist you.

Maintenance

All our BlocOut™ blind components are manufactured using aluminium and glass reinforced nylon. They do not present any corrosion problems in normal environments. The system has been designed for smooth operation, together with rigidity to prolong the window blinds working life.