

Neat Fit Made to measure blinds



Desirable range of pleated and honeycomb fabrics and a range of the UK's most popular aluminium slat colours

- No screws, no drilling
- No control cords, therefore completely child safe
- Quick and simple to fit. Easy to operate
- Delivery within 5 working days
- Bottom rails feature a unique magnet design to ensure excellent closure

The Aluminium Collection

A versatile blind which can be tilted or raised and lowered to control privacy and the amount of light in your home. Stylish yet practical the Neat Fit Aluminium blind is available in a choice of four slat colours, all with colour coordinating hardware.



The Honeycomb Collection

This highly efficient blind gives minimal light transmission. An extremely effective dimout blind which, due to its honeycomb structure, can also reduce heat loss by up to 63%. This can help to keep your room cool in the summer and warm in the winter. The Neat Fit Honeycomb blind is available in four contemporary and versatile colour choices, all with white hardware.



Honeycomb



Pleated

The Pleated Collection

An elegant blind which combines light and heat control with stylish sophistication. The perlex coating on the back of the fabric acts to reflect the sun and therefore keeps your room cool. Choose from two neutral colours that will subtly enhance any room décor.





Measuring and Fitting

To ensure the best possible fit, always measure your window width to the plastic beading (not the rubber gasket).

Take two measurements of the width, at the top and the bottom of the window. If there is any variation always use the shortest width to order your blinds.

You must measure accurately and to the nearest millimetre to ensure a good fit.

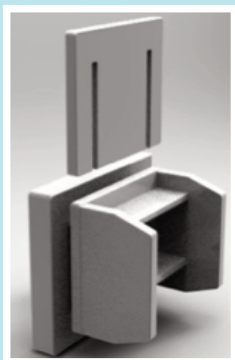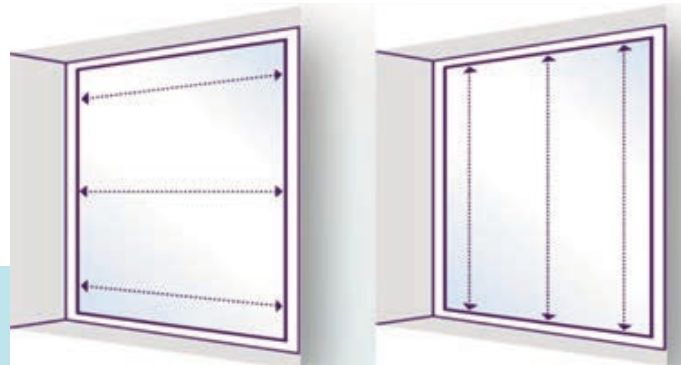

Unique end cap design and shim system to allow for fine adjustment at point of installation



Installation is quick and easy

The end cap on the head and bottom rails simply slide between the glass and rubber gasket which will not damage your window in any way. This unique pressure fit design ensures simple installation.




Slot

In the top left window corner, gently but firmly slide the left hand top rail tab in between the left hand rubber gasket and the glass.



Slide

Gently slide the top rail up the window and ease the right hand top rail tab between the rubber gasket and glass on the right hand side of the window.

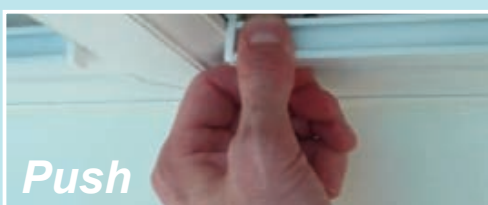

Do the same for the bottom rail.

Push all top rails firmly towards the top of the window and all bottom rails firmly towards the bottom of the window.

Your Neat Fit blind is now fitted and can be operated and enjoyed.

- NO SCREWS
- NO LOSS OF YOUR WINDOW GUARANTEE
- STYLISH AND AFFORDABLE
- REDUCES HEAT LOSS BY UP TO 63%* (HONEYCOMB ONLY)



*English Heritage Report 2009